


High Power Er:YAG Module

- Compact monolithic laser system
- Highly efficient diode pumping
- Fiber-coupled version available
- No high-voltage required
- Reduced waste heat
- Maintenance free
- Process variability

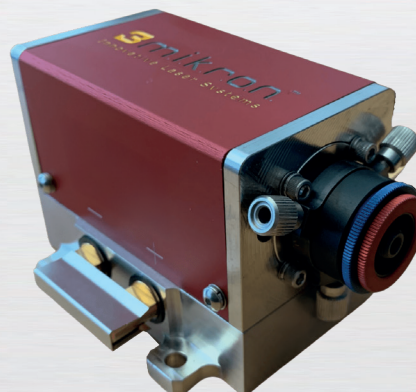

Specifications

DPM-80 (Er:YAG) free

Optical Parameters

| | |
|--------------------------------|---------------------|
| • Wavelength | 2940 nm |
| • Average Output Power (max) | 80 W |
| • Pulse Energy (max) | 2.3 J |
| • Pulse Repetition Rate | up to 250 Hz |
| • Pulse Duration | (100 - 600) μ s |
| • Average Current (max) | 6.25 A |
| • Mode of Operation | Pulsed |
| • Efficiency (optical-optical) | > 10 % |
| • Beam Shape (focus) | Top Hat like |
| • Free Beam Quality | $M^2 < 40$ |
| • Free Beam Diameter | 1.6 mm |
| • Free Divergence (half angle) | < 50 mrad |

Cooling Requirements

| | |
|--------------------------|--------------------------------------------------------|
| • Coolant | Distilled Water with Algaecide and Corrosion Inhibitor |
| • Coolant Temperature | (20 - 25) °C |
| • Coolant Flow Rate | > 5 lpm |
| • Coolant Pressure (max) | 4.5 bar |
| • Required Cooling Power | ≥ 780 W @ 25 °C Environment Temperature |

Electrical Parameters

| | |
|-------------------------------|--------------|
| • Diode Forward Voltage | ~ 120 V |
| • Diode Forward Current (max) | 250 A Pulsed |
| • Average Power Consumption | < 1000 W |

Mechanical Dimensions


| | |
|-------------------------|-----------------------------------|
| • Dimension (L x W x H) | (90 x 78 x 59) mm ³⁽¹⁾ |
| • Weight | 1 kg |
| • Emission Height | 38.1 mm |

⁽¹⁾ Dimensions for bare modules

Laser Diode Drivers

The LDD series are economic QCW laser diode driver modules designed to provide high current pulses to drive 3m.i.k.r.o.n.TM laser modules in various applications. The drivers deliver output currents up to 300 A and pulse widths variable from 50 µs up to 1000 µs operation ^[3]. Up to 1000 W average output power is available with the supplied heatsink. Several safety features are integrated to protect both laser module and laser driver.

| | |
|-------------------------------------|--------------------------------------------|
| | DPM-80 (Er:YAG) |
| Laser Diode Driver | LDD-140300 |
| • Output Current | up to 300 A |
| • Rise Time (10 - 90%) | < 20 µs |
| • Mechanical Dimensions (W x D x H) | (265 x 150 x 210) mm ³ |
| • Additional Features | Safety circuit and communication interface |



Test and Evaluate



The 3m.i.k.r.o.n.TM evaluation kits are ready-to-use and straightforward laboratory systems for first feasibility studies in research environment. The evaluation kits are available with different kinds of laser sources (see front page), shortens the development time, enables flexibility and a fast demonstration of feasibility. The test systems are delivered with your requested laser source, a laser control system and a cooling system for laboratory use only.

Please contact us for more information on rental or purchase conditions: info@pantec-biosolutions.com

3m.i.k.r.o.n.TM Applications

| Medical | Industrial |
|------------------------------|--------------------------------------------------------------------------|
| • Aesthetics / Dermatology | • Material Processing (Drilling, Cutting, Melting, Welding, Evaporation) |
| • Dentistry | • Analytics |
| • ENT | • Security |
| • Lithotripsy | • Defense |
| • Minimally-Invasive Surgery | |
| • Orthopedics | |
| • etc. | |

More Services



Customized laser sources
Optical and mechanical design
Contract development and manufacturing
Medical device consulting (IP research, Medical CE, ...)

